


# Novelda CCT LED Sign Light

Floods and Spotlights

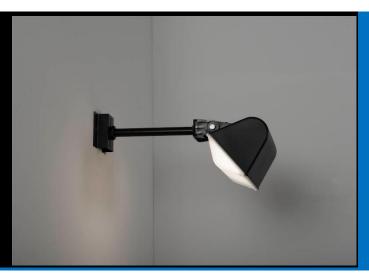

#### **Product Information**

The 3 CCT Novelda LED Polycarbonate Sign lights are a 3 in one solution for uses in exterior applications where the option to be able to adjust the colour to suit the application is required. These are ideal for Pubs, restaurants, and sign lighting applications.

Complete with a 3 year warranty



#### **Product Features**

- 3 year warranty
- Class II
- IP65
- High CRI up to Ra85
- 3 switchable Colour temperatures 3000K/4000K/6000K
- Epistar LED Chip Technology
- Supplied complete with 1000mm flex
- Adjustable head via hex bolt
- 100° beam angle
- Optional Extension Mounting Brackets (KSR6103/6104)
- L70 30,000hrs

## **Product Specification**

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR6102	Novelda 14W CCT Polycarbonate Signlight	14	3000	1225	81	E	II
			4000	1340	83		
			6000	1165	85		
Accessories							
KSR6103	Novelda 520mm Bracket for KSR6102					-	
KSR6104	Novelda 220mm Bracket for KSR6102						

Nominal voltage	220~240VAC		
Operating frequency	50-60Hz		
Circuit Wattage	13.9w including Driver (4000K Output)		
Circuit Current	0.07A		
Driver Current Rating	270mA		
PFC	0.88		
In Rush Current	2.0Amps Max Peak		
Start Time	< 0.5 Sec		
Ambient temperature range	-15°c to +40°c		
IP rating	65		

#### Construction

Body: Polycarbonate
Lens: Opal Polycarbonate

### **Standards**


BSEN60598-1:2021 Luminaires – Part 1: General Requirements and tests

## In Conformity with


LVD Low voltage directive 2014/35/EU

EMC Electromagnetic compatibility directive 2014/30/EU ERP Energy related products directive 2019/2020/EU RoHS Restriction of hazardous substances 2015/863/EU


#### **Product Dimensions**

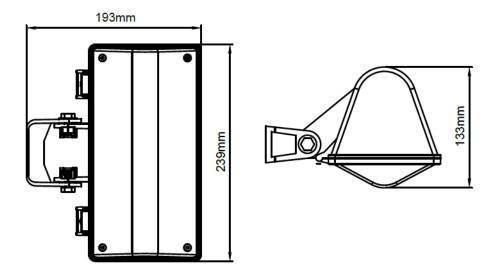

KSR6102

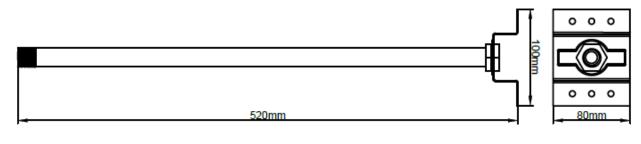

KSR6103

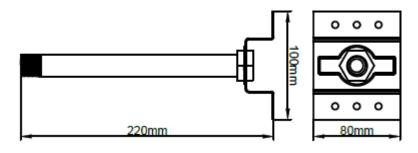

KSR6104

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.