

# Cabello Range

*Exterior Recessed Lighting*



Data Sheet

## Product Information

Cabello recessed lights are ideal for lighting decking.

Comes with a 2 year warranty for your peace of mind.

## Product Features

- 2 year warranty
- Class III/Class II drivers
- IP65/IP67 for LED drivers
- Available in 3000K, 6000K or Blue LED
- AISI 316L Stainless Steel Rim Construction
- Requires 12V constant voltage driver
- Must be wired in Parallel
- Non-Dimmable
- L70 – 20,000hrs



KSRDL283/284

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	Energy Efficiency Class	Protection Class
KSR1289	Cabello Square Recessed Light	0.5W per head	3000	N/A	G	III
			6000			
			Blue			
KSR1293	Cabello Round Recessed Light	0.5W per head	3000	N/A	G	III
			6000			
			Blue			
KSRDL283	12W 12V Constant Voltage Driver	12W max				II
KSRDL284	20W 12V Constant Voltage Driver	20W max				II

Nominal voltage	12V
Operating frequency	N/A
Circuit Wattage	0.5W
Circuit Current	0.14A
Driver Output	12V DC
In Rush Current	N/A Dependant on driver specification
Ambient temperature range	-10°C~+40°C
Start time	< 0.5 sec
IP rating	65

## Construction

Body: Cast Aluminium  
Rim: AISI 316L Stainless Steel

## Standards


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

## In Conformity with


LVD Low voltage directive 2014/35/EU  
EMC Electromagnetic compatibility directive 2014/30/EU  
ERP Energy related products directive 2019/2020/EU  
RoHS Restriction of hazardous substances 2015/863/EU

# Product Dimensions

## KSR1289

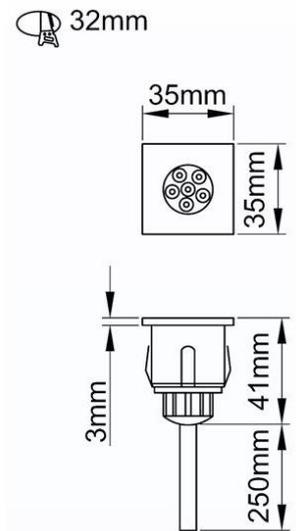

## KSR1293

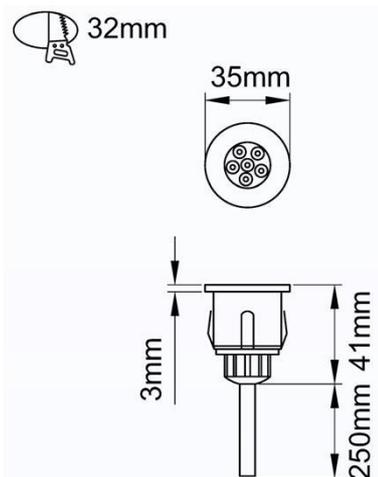

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.