










Available finishes:- Black or White

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20

Product Code	Description	Wattage / CCT	Beam Angle	CRI (Ra)	Lumen output
KSR6609	Mag-Trac I - 7W 3K LED Track Fitting	7W / 3K	38°	98	460lm
KSR6610	Mag-Trac II - 12W 3K LED Track Fitting	12W / 3K	35°	98	705lm
KSR6611	Mag-Trac III - 9W 3K LED Track Fitting	9W / 3K	108°	95	410lm
KSR6612	Mag-Trac IV - 12W 3K LED Track Fitting	12W / 3K	29°	92	860lm
KSR6613	Mag-Trac I - 5W 3K LED Track Pendant	5W / 3K	23°	97	215lm
KSR6614	Mag-Trac II - 5W 3K LED Track Pendant	5W / 3K	220°	97	180lm
KSR6615	Mag-Trac III - 4W 3K LED Track Pendant	4W / 3K	68°	97	175lm

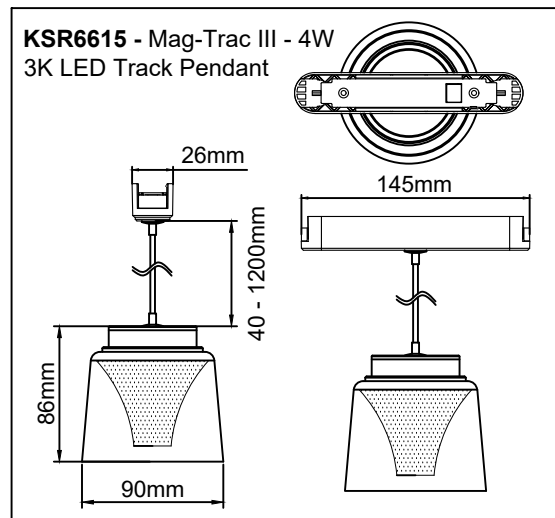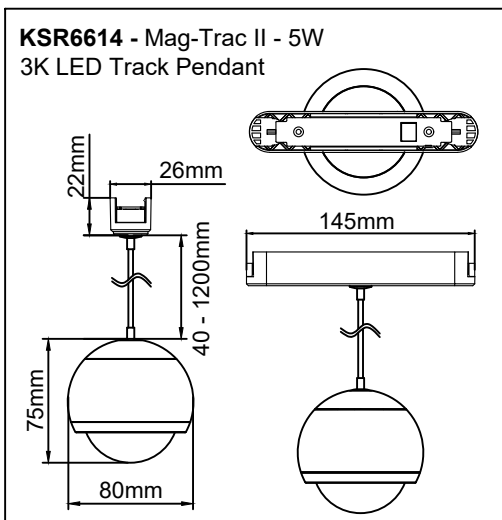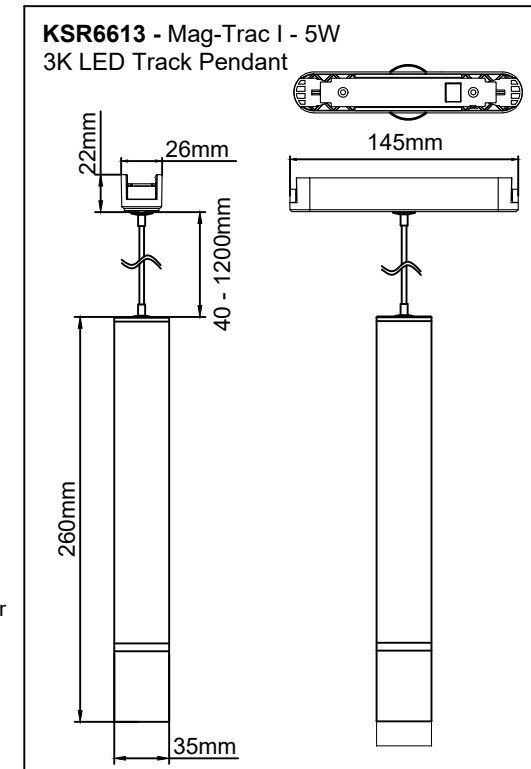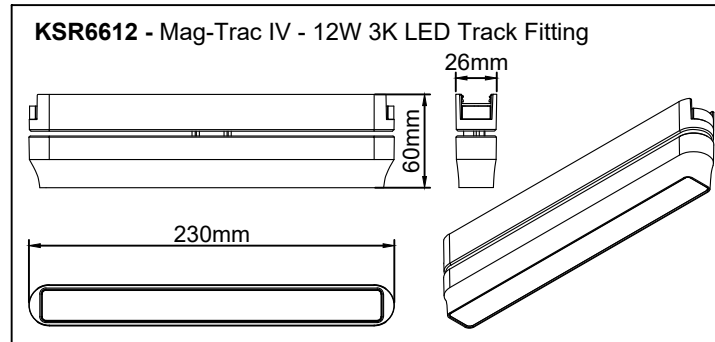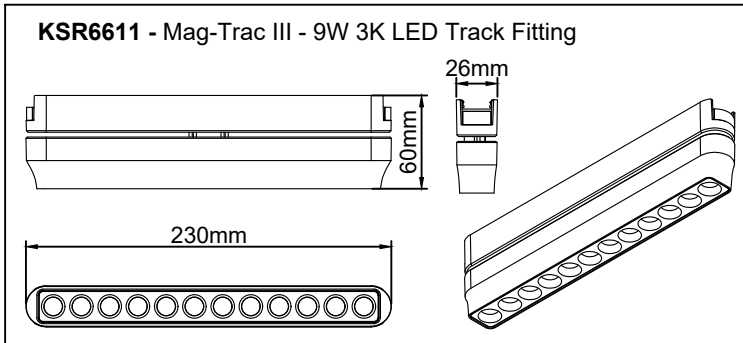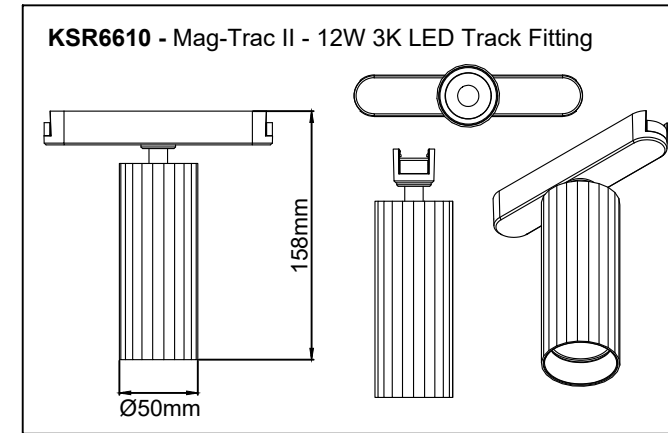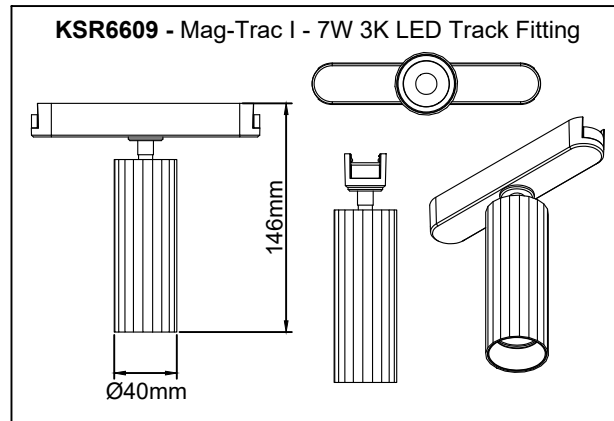

These fittings are Class III and designed to be supplied from a separated / safety extra-low voltage (SELV) 48V power source. The voltage from a SELV supply is low enough that under normal conditions a person can safely come into contact with it without risk of electrical shock

10 Metre Max Run Permitted and max wattage of 150W regardless of Driver output etc. The system is NOT dimmable, Can be wall or ceiling mounted. DO NOT slide the fittings along the track as this will mark / damage the track, push the tabs in at each end of the track adaptor to remove. An end cap is required to take any of the other accessories (Except Live feed & Power Supply).

