

Navara Pro

Commercial Lighting



Data Sheet

Product Information

The Navara Pro LED battens are suitable for a multitude of applications. With a clipped removeable diffuser and contemporary design. The light output is designed to replace 4', 5' single/twin fittings and 6'twin fittings.

They come complete with a 5 year warranty for your peace of mind.

Product Features

- 5 year warranty
- Class I
- IP20
- High efficiency up to 125lumen per circuit watt
- 4000K LED
- 110° beam angle
- Wide Range of Dimmable Options Available
- Available in Emergency
- Instant on
- Range of sizes and wattages
- Lighting designers can download photometric data from our website
- L70 - 40,000Hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR9890	Navara Pro-4S	22	4000	2290	>80	I
KSR9890/EM	Navara Pro-4S Emergency	22	4000	2290	>80	I
KSR9891	Navara Pro-4T	38	4000	4105	>80	I
KSR9891/EM	Navara Pro-4T Emergency	38	4000	4105	>80	I
KSR9892	Navara Pro-5S	30	4000	3100	>80	I
KSR9892/EM	Navara Pro-5S Emergency	30	4000	3100	>80	I
KSR9893	Navara Pro-5T	60	4000	6430	>80	I
KSR9893/EM	Navara Pro-5T Emergency	60	4000	6430	>80	I
KSR9894	Navara Pro-6T	65	4000	6950	>80	I
KSR9894/EM	Navara Pro-6T Emergency	65	4000	6950	>80	I

*For dimming options use DALI, DSI, SwitchDIM, Corridor Function or 1-10v (KSR9891-9894 only) after code

**For emergency add EM to end of part code

Nominal voltage	220-240V
Operating frequency	50/60Hz
Ambient temperature range	-20°C~+40°C
Start time	< 0.5 sec
IP rating	20

Construction

Body:	Steel
Diffuser:	Polycarbonate


Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU


Product Dimensions

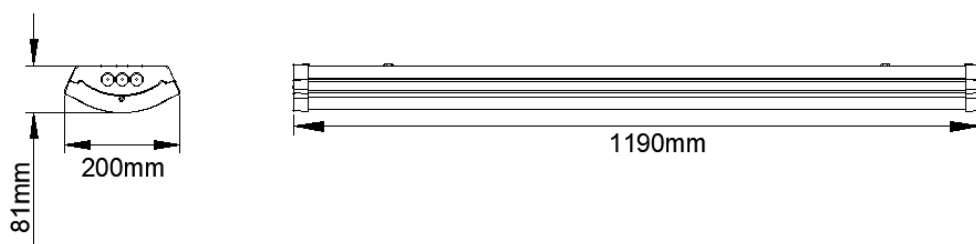

KSR9890/91



KSR9892/93

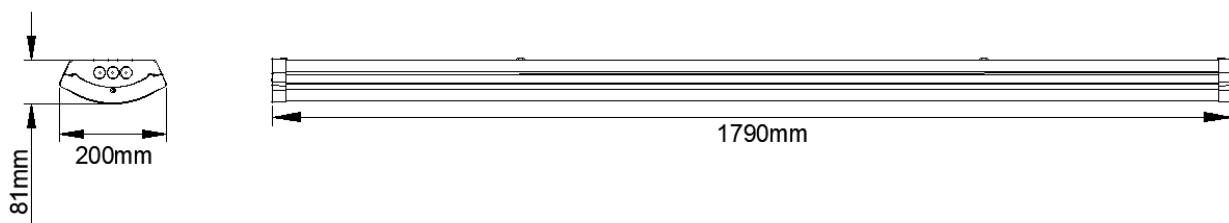

KSR9894

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.